


Layout drawing

Machine area make room for 1 m!

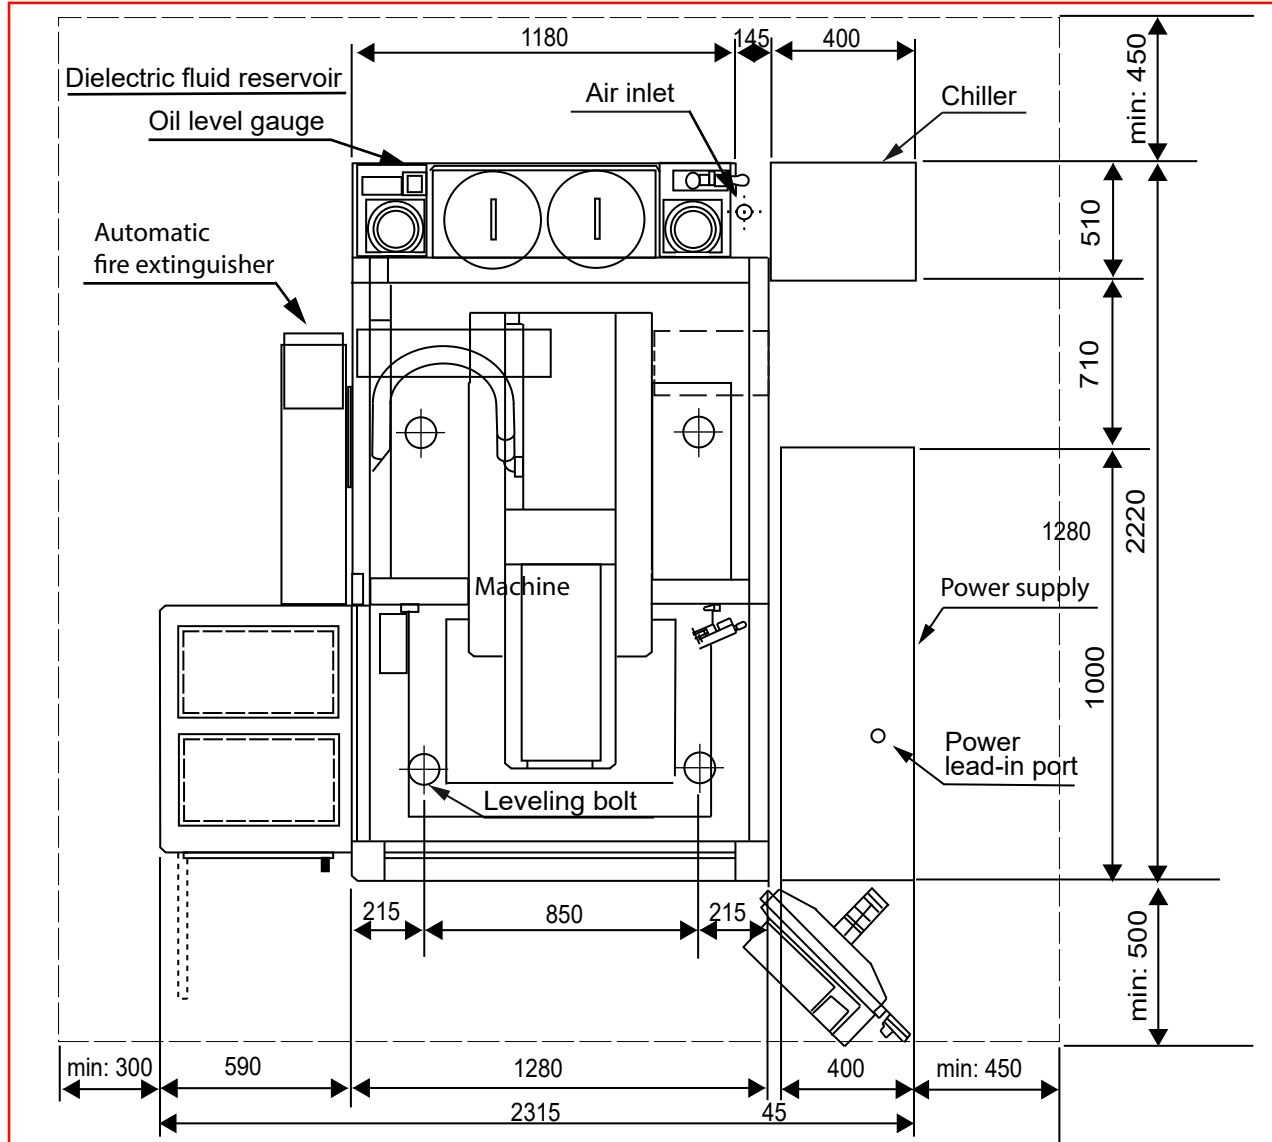

Additional information

Weight of machine body: 3.500 kg
 Weight of power supply unit: 315 kg
 Height of machine: 2.400 mm
 (with leveling bolt & exhaust. duct.)

Requested minimum measurement for entrance door/gate (WxH) with LS20T-ATC: 1.915 x 2.500 mm

- 1: Power supply
 3 phases 400 V / AC, PE
 $\pm 10\%$, 50/60 Hz, 20 kVA
- 2: Pneumatic connection: 5-7 kgf/cm³ » 500-700 kpa
 Air volume minimum: 27 l/min
 3/8" hose connection
- 3: For a fire extinguish installation a fixed connection in the near of the control unit is necessary. A socket is not allowed.
 1 phase AC 240 V with 10 A fuse.
- 4: Network connection
- 5: The erosion system should be set up to preferably consolidated concrete floors on a suitable hard industrial ground. To the capacity of MITSUBISHI possibly necessarily becoming shielding measures do not belong in accordance with EMV guideline.



	Datum/ Date:	Name/ Name:
gezeichnet/drawn:	10.01.2020	Y. Ucar
geprüft/checked:	18.12.2020	Y. Ucar
überarbeitet/revised:	04.02.2022	Y. Ucar